

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 589 552 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**23.10.2002 Bulletin 2002/43**

(51) Int Cl.7: **H04L 12/28, H04Q 7/20**

(21) Application number: **93305323.3**

(22) Date of filing: **07.07.1993**

(54) **Method and apparatus for maintaining connectivity of nodes in a wireless local area network**

Verfahren und Vorrichtung zur Verbindungsmöglichkeitserhaltung von Knoten in einem drahtlosen lokalen Netz

Méthode et appareil pour le maintien de la connection des noeuds dans un réseau local sans fil

(84) Designated Contracting States:  
**DE FR GB NL**

(30) Priority: **08.09.1992 US 941735**

(43) Date of publication of application:  
**30.03.1994 Bulletin 1994/13**

(73) Proprietor: **SUN MICROSYSTEMS, INC.**  
**Mountain View, CA 94043 (US)**

(72) Inventor: **Rom, Raphael**  
**Palo Alto, California 94306 (US)**

(74) Representative: **Wombwell, Francis**  
**Potts, Kerr & Co.**  
**15, Hamilton Square**  
**Birkenhead Merseyside L41 6BR (GB)**

(56) References cited:  
**EP-A- 0 483 551** **US-A- 5 123 029**

**EP 0 589 552 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

[0001] The present invention relates to the field of wireless local area networks (LANs) and, more particularly, to a method and apparatus for maintaining connectivity of nodes in a wireless LAN.

#### 2. Description of the Related Art

[0002] Through the merging of computer and communications technology, computer networks have greatly enhanced the computing power available to the individual computer user linked to other computers in a network. Not only do networks provide for the exchange of information between autonomous computers, but they also enable each user or "node" to share resources common to the entire network. Through resource sharing, all application programs, data bases and physical equipment in the network may be made available to any node without regard to the physical location of the resource or the user.

[0003] As for the linkage between nodes, there are generally two types of network interconnections. The nodes in a wired network communicate with each other by using transmission lines to carry the signals between the nodes. The nodes in a wireless network, on the other hand, communicate with each other using radio signals or other types of wireless links rather than physical interconnections.

[0004] One type of wireless network is a wireless local area network (LAN). A LAN is local in the sense that the transceiver nodes are located within a radius of only a few miles of each other. As such, the proximity of the nodes permits the network to operate reliably at low power and at high data rates.

[0005] Typically, nodes in a wireless LAN are mobile and transmit information in packets. These nodes, although mobile, may be geographically grouped at any given time into basic service areas (BSAs), otherwise referred to as "cells." The nodes within a cell communicate with each other either directly or through a cell coordinator that relays messages among the nodes of the cell. The coordinator itself may be implemented either within a regular node or in a node that only performs the coordination function.

[0006] Communication between nodes in different BSAs is accomplished through an access point (AP), which is responsible for relaying packets into and out of the BSA. To allow for inter-cell communication, each cell must contain at least one AP. The coordinator and the AP are often implemented in the same node. Communication among the APs may take place over the same or different radio channels or via a separate wired network.

[0007] During node power-up, the node is assimilated into the network environment using what is known as the network "self-organization" capability. During self-organization, each node is associated with a coordinator in a cell (if one exists), and in a multi-cell system each node is also associated with at least one AP in a cell. The association of a node with a particular AP may be based on criteria such as the quality of the link between the node and the AP, and the load carried by the AP. The self-organization procedure is considered complete when a node has acquired the parameters that will enable it to effectively communicate within the cell with peer nodes or relay points.

[0008] As conditions in the network environment vary, the network must be reconfigured to maintain connectivity between communicating nodes. This reconfiguration or topological change requires the reassociation of a node with another coordinator or another AP or both. The process of ceasing communications between a node and a coordinator or between a node and an access point and reassociating the node with another coordinator or access point is known as "handoff". In a mobile telecommunications system, a handoff is typically required when a node has moved away from one AP towards another, either within a cell or across cells. Network reconfiguration may also arise as a result of a change in the quality of reception between a node and an AP, or because an AP has become overloaded.

[0009] In conventional cellular telephone systems, the handoff process is controlled solely by the base stations (corresponding to APs). Because the node does not participate at all (or participates only minimally) in the handoff process, cellular telephone systems require a considerable amount of cooperation among the base stations. This cooperation entails identifying those base stations that are in radio contact with the node as well as determining the most suitable new base stations. However, radio links are asymmetric, and the signal characteristics transmitted are not necessarily the same as those received. Thus, a base station cannot determine how well a node receives a signal transmitted by the base station based upon how well the base station receives a signal from the node. This phenomenon makes the base station selection even more complex.

[0010] Once the system is reconfigured, any messages destined for the node must be rerouted to the new base station. In a cellular telephone system, each node can conduct only one conversation at a time with another node in the network. In such a system, a conversation is routed through a series of switches located between the two nodes at the ends of the communication path. When one of those nodes is handed off to another base station, the path must be reconfigured, usually requiring that the message pass through a path consisting of a different set of switches.

[0011] Because each telephone in a cellular telephone system carries on only one conversation at a time, it is a relatively simple matter to reconfigure the

entire communication path to hand off the telephone conversation. However, unlike a telephone unit in a cellular system, a node in a computer network communicates at high data rates and has the capability to carry on multiple conversations simultaneously with other nodes. The nodes in a computer network typically communicate via packets, wherein each packet may represent a portion of a conversation, and each such packet can be interleaved in any manner with other packets that contain portions of other conversations. Because of the large number of conversations carried on by a node, reconfiguration of all of the communication paths carrying those conversations is understandably a very complex process. Moreover, the fact that computers communicate in this manner renders the technique used by cellular telephone systems inadequate to accomplish the handoff of a computer node because of the inordinate amount of time that would be required to reconfigure the entire communication path to reroute all of these conversations.

#### SUMMARY OF THE INVENTION

[0012] It is therefore an object of the present invention to provide a wireless local area network (LAN) in which the node participates in the coordination of the handoff process.

[0013] It is a further object of the invention to provide a wireless LAN in which connectivity is maintained among users carrying on multiple conversations at high data rates.

[0014] Accordingly, the present invention provides a method as in claim 1 and claim 11 and apparatus as in claim 12 for maintaining connectivity in a wireless LAN. The LAN is divided into a plurality of cells. Each cell is occupied by at least one access point for communicating information between the cells, and at least one node for communicating via the LAN through the access points.

[0015] To initiate a handoff from a first access point with which the node is currently communicating, the node first selects a second access point as a candidate for handoff. The node then communicates an instruction to the first access point instructing the first access point to relay a request to the second access point that the second access point accept a handoff of the node from the first access point. The first access point then relays the request to the second access point. In response, the second access point transmits its operating parameters to the node through the first access point, and the node adjusts its own parameters in response so as to establish communication between the node and the second access point, thereby accomplishing handoff.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The objects, features and advantages of the present invention will be apparent to one skilled in the

art in light of the following detailed description in which:

[0017] Figure 1 is an illustration of a wireless LAN.

[0018] Figures 2A and 2B illustrate the handoff of a node in a wireless LAN.

5 [0019] Figure 3A is a flow chart illustrating the method of the present invention; and Figure 3B illustrates an alternative implementation of one of the steps of the method of Figure 3A.

10 [0020] Figure 4 illustrates the reconfiguration of a prior art cellular network telephone after handoff.

[0021] Figure 5 illustrates the reconfiguration of a wireless LAN after handoff according to the present invention.

15 [0022] Figure 6 illustrates an apparatus implementing the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

20 [0023] The present invention provides a method and apparatus for maintaining connectivity of nodes in a wireless LAN. Unlike prior art systems, in the present invention the node participates in the decision as to whether it will be handed off and, if so, to which access point. Moreover, the invention applies not only to a node maintaining a single conversation, but it also supports multiplexed communication among nodes operating at high data rates in a packet switching environment.

25 [0024] Figure 1 illustrates a typical wireless LAN. Nodes 10 are organized into geographic regions called "basic service areas" (BSAs) or "cells" 11. Note that a node can belong to more than one cell. The nodes within a cell communicate with each other either directly or through a coordinator 12, which relays messages among the nodes of the cell.

30 [0025] A node within one cell cannot communicate directly with a node in another cell. Rather, the message must be relayed through a series of access points (APs) 13, which are linked together either through a separate radio channel or a wired network 14.

35 [0026] Each cell contains at most one coordinator and at least one access point, and each node within a cell is associated with at most one coordinator and at least one access point. The functionality of the coordinator and the access point may be combined in a single device 15. In addition, more than one node may be associated with a given AP. For example, two nodes 10 are associated with AP 13, as indicated by the dotted lines.

40 [0027] The determination of which AP is to be associated with a particular node is based upon criteria such as the quality of the signal transmitted between the node and the AP, and the load carried by the AP. This process of associating a node with an AP is known as "self-organization," and is well known in the art. Preferably, the invention utilizes the self-organization process described in copending U.S. Patent application Serial No. 45 07/915,433, filed July 17, 1992, titled "METHOD AND APPARATUS FOR IMPLEMENTING SELF-ORGANIZATION IN A WIRELESS LOCAL AREA NETWORK."

[0028] Figures 2A and 2B generally illustrate the handoff process in a wireless LAN. Figures 2A and 2B show a node 20 traveling from one BSA to another. Initially, node 20 is associated with an access point 21. As node 20 moves away from AP 21 and towards AP 22, the quality of the radio link between AP 21 and node 20 deteriorates. Thus, it is desirable to sever the link between node 20 and AP 21, and reassociate node 20 with an AP that would offer a higher quality of message transmission to node 20.

[0029] As node 20 approaches the cell occupied by access point 22, AP 22 becomes a potential candidate for reassociation because it is now closer to node 20, and thus is likely to offer a better communications link to the node. Therefore, node 20 is handed off to AP 22, as shown in Figure 2B.

[0030] Figure 3A is a flow chart illustrating the method of the present invention. To initiate the process, the node first determines whether handoff is necessary, as shown in step 30. For example, the node may measure the quality of the signal received from the access point with which it is communicating, and determine that handoff is necessary when received signal quality drops below a predetermined threshold. In one embodiment, the determination by the node of whether a handoff is necessary may be made in response to a request from the access point with which the node is currently communicating, as shown in Figure 3B. The current access point communicates a request to the node that it initiate the reassociation process in order to be handed off to another access point, step 37. The node has the option of accepting or rejecting this request, step 38. In another variation, the determination of whether handoff is necessary may be made solely by the current access point. These latter two approaches are useful in the case that the current access point is associated with so many nodes that the traffic of messages communicated through the access point is exceeding its maximum predetermined load, even though the radio link between the node and the access point may be adequate.

[0031] When handoff is deemed necessary, the node acquires parameters from other access points. These parameters may include, for example, information concerning administrative domain and access point load. (The administrative domain represents the particular authority which operates a given access point.) Based upon this information and the quality of the signals received from the other access points, the node determines an AP to select for reassociation, step 31.

[0032] The selection of the new access point by the node represents a significant advantage over prior art systems in which the node does not actively participate in the reassociation process. In conventional systems, the access points must determine, through communications among themselves, which AP will be associated with the node for handoff, using such criteria as which AP receives the highest quality signal from the node. However, due to the asymmetric nature of radio links,

the node itself can best determine the quality of the signal received at the node. Thus, by accounting for the signal reception at the node, the present invention achieves a substantial improvement in the quality of the node-access point association.

[0033] After selecting a new access point, the node communicates an instruction to the current access point instructing it to relay a message to the selected access point, requesting that the selected access point accept the handoff of the node, step 32. This request is relayed to the selected access point by the current access point, along with a transfer of certain node parameters representing characteristics of the node, step 33. These node parameters may include, for example, an identification of the user occupying the node.

[0034] Under one approach, the selected access point responds automatically to the node's request by transferring its operating parameters to the node through the old access point. The operating parameters typically include, but are not limited to, the frequency of the channel on which the selected access point communicates with nodes, spreading codes (in spread spectrum systems) and data encryption information required to access the selected access point. Based upon these access point parameters, the node adjusts its own parameters and commences communication with the new access point, thereby accomplishing handoff, step 35.

[0035] Alternatively, the selected access point does not automatically transfer its operating parameters in response to the request of the node. Rather, the selected access point determines whether to accept the handoff based upon predetermined criteria, including the node parameters, step 34. For example, the selected access point may examine whether its load is light enough to accommodate communication with another node, whether the quality of the signal received from the node is satisfactory, and whether the identification of the node reveals that it is authorized to communicate with the selected access point. If the selected access point accepts the handoff, then it transmits its operating parameters to the node through the old AP, so that handoff may be accomplished, step 35.

[0036] If, at step 34, the selected access point rejects the request of the node, then the node repeats the reassociation process, steps 31, 32, 33, 34, to select a different access point with which to establish communications.

[0037] After handoff has been accomplished, messages intended for the node must be rerouted to the new access point in order to maintain connectivity of the node with the rest of the network. As shown in Figure 4, in a conventional cellular telephone system, the system may be reconfigured at every point in the communication path in order to reroute a message from its source node 51 to the access point 52 that has accepted handoff of the node 53 from the previous access point 54. As discussed above, this conventional method is too slow to accommodate the handoff of a node that may

be engaged in multiple conversations with other nodes.

[0038] In contrast, the present invention avoids this degree of complexity. This is illustrated by Figure 5. Instead of reconfiguring in advance every point throughout the path, the communication path remains intact except that the message is now forwarded from the old access point 61 to the new access point 62. For example, when a message intended for the node 60 is received at access point 61, AP 61 forwards the message to the new access point 62. In this manner, the invention establishes connectivity of the node with network through the second access point, step 36.

[0039] In addition, the old access point 61 may inform other nodes and access points that node 60 is now associated with new access point 62, thus allowing the other access points to adjust their parameters and communicate directly with access point 62. This process of informing other nodes and access points may be performed at a time convenient to do so, i.e., when there is a break in communications and need not be done immediately.

[0040] By avoiding reconfiguration of the network at every point in the communication path, the present invention achieves a significant advantage over conventional systems. As discussed above, the conventional method is too slow to accommodate the handoff of a node that may be engaged in multiple conversations with other nodes. However, the manner in which the present invention establishes connectivity between the node through the new access point and the rest of the network is much simpler and faster than the full scale reconfiguration required by conventional means.

[0041] Figure 6 is a simplified block diagram of a node 70 and two access points 74 and 78, which may be used to implement the present invention. Note that although the combination of functions featured in the invention is novel and unique, the construction of an apparatus to implement each of these functions individually is well known to one skilled in the art.

[0042] Each node 70 includes a node processing unit 71 which communicates with a device 72 and is connected to an antenna 73 to permit communication between the node and the network. The device 72 represents any apparatus that occupies a node, e.g., a computer, a peripheral device or communications hardware.

[0043] Access point 74 includes an AP processing unit 75, which is linked to antenna 76 to allow AP 74 to communicate with node 70 and other nodes in the network.

[0044] All communications among access points are handled through AP link 77, which may be implemented as a radio transceiver or as an interface to a separate wired network of access points.

[0045] Through AP link 77, access point 74 is connected to other access points, such as access point 78. Access point 78, like access point 74, includes an AP processing unit 79 connected to AP link 77 and an antenna 80.

[0046] The node processing unit 71, through antenna 73, communicates via radio with first access point processing unit 75 through antenna 76. The node processing unit 71 may decide that the node 70 should establish communications with another access point if, for example, the quality of signal received by the node processing unit 71 from the first access point 74 falls below a predetermined signal quality threshold, or if the traffic load being carried by the first access point processing unit 75 exceeds a predetermined load threshold. When handoff is deemed necessary, the node processing unit 71 acquires parameters from other access points. For example, second access point processing unit 79, through antenna 80, may transmit information regarding administrative domain and access point load. Based upon this information and the quality of the signals received from the other access points, the node processing unit 71 selects an AP, such as second access point 78, for reassociation.

[0047] After selecting an AP, the node processing unit 71 communicates an instruction to first access point processing unit 75 to relay a request over AP link 77 to second access point processing unit 79, requesting that second access point 78 accept a handoff of the node 70. The request is relayed to second access point processing unit 79 along with a transfer of certain node parameters representing characteristics of the node 70.

[0048] Based upon a number of factors, including the node parameters, the AP processing unit 79 determines whether to accept the handoff. If so, then through AP link 77, second access point processing unit 79 transmits operating parameters across AP link 77 to first access point processing unit 75 to be relayed to the node 70. The node processing unit 71 adjusts the operating parameters of the node so that it can communicate across a radio link through antennas 73 and 80 to the second access point processing unit 79, thereby accomplishing handoff.

[0049] To maintain connectivity of the node 70 with the rest of the network after handoff, the first access point processing unit 75 forwards messages intended for node 70 across AP link 77 to the second access point processing unit 79 upon receipt of those messages at the first access point 74. In addition, the first access point processing unit 75 may inform other access points over AP link 77 that node 70 is now associated with second access point 78, thus allowing the other access points to communicate directly with access point 78.

[0050] Although the invention has been described in conjunction with the preferred embodiment, it will be appreciated that various modifications and alterations might be made by those skilled in the art without departing from the scope of the invention.

## Claims

1. A method for maintaining connectivity of a node in

- a wireless local area network, LAN the LAN comprising a plurality of cells (11), each cell including at least one access point (13) for communicating information between cells and at least one node (10) for communicating via the LAN through said access points, the method comprising the steps of:
- (a) the node selecting a second access point (31) as a candidate for accepting a handoff of the node from a first access point; 10
  - (b) communicating an instruction from the node to the first access point (32) instructing the first access point to relay a request to the second access point that the second access point accept a handoff of the node from the first access point to the second access point; 15
  - (c) relaying said request from the first access point to the second access point (33); and
  - (d) performing the handoff (35), such that the node communicates with the second access point. 20
2. The method as set forth in claim 1, further comprising the step of determining whether said second access point will accept the request for a handoff (34). 25
  3. The method as set forth in claim 2, further comprising the step of repeating said selecting, communicating, relaying and determining steps if said second access point determines not to accept said request for a handoff. 30
  4. The method as set forth in claim 1, wherein the step of performing a handoff (35) comprises the steps of: 35
    - (a) transmitting second access point operating parameters from said second access point to said first access point;
    - (b) relaying said second access point operating parameters to said node from said first access point; and 40
    - (c) adjusting node parameters in response to said second access point parameters so as to establish communication between said node and said second access point. 45
  5. The method as set forth in claim 4, wherein one of said second access point operating parameters comprises a spreading code utilized by said second access point. 50
  6. The method as set forth in claim 1, further comprising the step of, after said handoff has been performed (35), forwarding a message that is destined for said node from said first access point to said second access point upon receipt of said message at said first access point, wherein the second access point communicates the message to the node. 55
  7. The method as set forth in claim 1, further comprising the step of, after said handoff has been performed (35), informing other access points that said node has been handed off to said second access point, such that communications to said node are achieved through said second access point.
  8. The method as set forth in claim 1, before said selection step, further comprising the step of the node determining whether to establish connectivity with another access point.
  9. The method as set forth in claim 8, further comprising the steps of:
 

communicating a handoff initiation message from said first access point to said node requesting that said node establish connectivity with another access point; and  
said node determining whether to establish connectivity with another access point in response to the request of the first access point.
  10. The method as set forth in claim 1, before said selection step, further comprising the step of the first access point determining whether the node should establish connectivity with another access point.
  11. A method for maintaining connectivity of a node in a wireless local area network, LAN, the LAN comprising a plurality of cells (11), each cell including at least one access point (13) for communicating information between cells and at least one node (10) for communicating via the LAN through said access points, the method comprising the steps of:
 

said node determining whether to establish connectivity with another access point; and  
if said node determines to establish connectivity with another access point:

said node selecting a second access point (31) as a candidate for accepting a handoff of said node from a first access point;  
communicating an instruction from said node to said first access point (32) instructing said first access point to relay a request to said second access point that said second access point accept a handoff of said node from said first access point to said second access point;  
relaying said request from said first access point to said second access point (33);  
determining whether said second access point will accept said handoff (34);  
if said second access point determines to accept said handoff:

transmitting second access point operating parameters from said second access point to said first access point, wherein one of said operating parameters comprises a spreading code utilized by said second access point; relaying said second access point operating parameters to said node from said first access point; adjusting node parameters in response to said second access point operating parameters so as to establish communication between said node and said second access point, thereby accomplishing a handoff (36), and if said second access point determines not to accept said handoff, repeating said selecting, communicating, relaying and determining steps.

12. An apparatus for maintaining connectivity in a wireless local area network, LAN, comprising a plurality of cells (11), the apparatus comprising:

a plurality of access points (13) for communicating information between cells; link means connected to first and second access points for permitting communications between said first and second access points; and at least one node (10) for communicating over the LAN through said access points; each node comprising:

selection means for selecting a second access point as a candidate for handoff of said node from a first access point; instruction means for forming and communicating an instruction to said first access point instructing said first access point to relay a request to said second access point requesting that said second access point accept a handoff of said node from said first access point; and handoff means for handing off said node to said second access point, such that the node communicates with the second access point.

13. The apparatus as set forth in claim 12, wherein said second access point comprises access point determining means for determining whether said second access point will accept said handoff.
14. The apparatus as set forth in claim 13, wherein, if said access point determining means is adapted to determine to reject said handoff, said selection means is adapted to select an alternate access

point and said instruction means is adapted to communicate an instruction to the first access point instructing the first access point to relay a request to the alternate access point requesting that the alternate access point accept a handoff of the node.

15. The apparatus as set forth in claim 12, wherein:

said second access point comprises means for relaying second access point operating parameters to said node through said link means and said first access point; and said handoff means comprises means for adjusting node parameters in response to said second access point operating parameters so as to establish communications between said node and said second access point.

16. The apparatus as set forth in claim 15, wherein one of said second access point operating parameters comprises a spreading code utilized by said second access point.

17. The apparatus as set forth in claim 12, said first access point further comprising forwarding means for forwarding a message that is destined for said node from said first access point to said second access point upon receipt of said message at said first access point.

18. The apparatus as set forth in claim 12, said first access point further comprising means for informing other access points that said node has been handed off to said second access point, such that communications to said node are achieved directly through said second access point.

19. The apparatus as set forth in claim 12, wherein said node further comprises initiation determining means for determining whether said node will establish connectivity with another access point.

20. The apparatus as set forth in claim 19, wherein said first access point further comprises a handoff request means for communicating a handoff initiation message from said first access point to said node requesting that said node establish connectivity with another access point, and said initiation determining means further comprises means for determining whether said node will establish connectivity with another access point in response to the request of the first access point.

21. The apparatus of claim 19, wherein said first access point further comprises means for determining whether the node should establish connectivity with another access point.

# Patentansprüche

1. Ein Verfahren zum Aufrechterhalten einer Verbindungsfähigkeit (connectivity) eines Knotens in einem drahtlosen lokalen Netzwerk, LAN, wobei das LAN eine Mehrzahl von Zellen (11) aufweist, wobei jede Zelle wenigstens einen Zugangspunkt (13) zum Übermitteln von Informationen zwischen Zellen und wenigstens einen Knoten (10) zum Kommunizieren über das LAN über die Zugangspunkte enthält, wobei das Verfahren die Schritte umfaßt, daß

- a) der Knoten einen zweiten Zugangspunkt als Kandidaten zum Akzeptieren eines Weiterreichens (handoff) des Knotens von einem ersten Zugangspunkt auswählt (31);
- b) eine Instruktion aus dem Knoten zu dem ersten Zugangspunkt übermittelt wird (32), die den ersten Zugangspunkt instruiert, eine Anforderung an den zweiten Zugangspunkt weiterzuleiten, daß der zweite Zugangspunkt ein Weiterreichen (handoff) des Knotens von dem ersten Zugangspunkt zu dem zweiten Zugangspunkt akzeptiert;
- c) die Anforderung aus dem ersten Zugangspunkt zu dem zweiten Zugangspunkt weitergeleitet wird (33); und
- d) das Weiterreichen (handoff) durchgeführt wird (35), so daß der Knoten mit dem zweiten Zugangspunkt kommuniziert.

2. Das Verfahren nach Anspruch 1, ferner umfassend den Schritt des Bestimmens, ob der zweite Zugangspunkt die Anforderung nach einem Weiterreichen (handoff) (35) akzeptiert.

3. Das Verfahren nach Anspruch 2, ferner umfassend den Schritt des Wiederholens der Schritte des Auswählens, Übermittels, Weiterleitens und Bestimmens, wenn der zweite Zugangspunkt bestimmt, daß er die Anforderung für ein Weiterreichen nicht akzeptiert.

4. Das Verfahren nach Anspruch 1, wobei der Schritt des Durchführens eines Weiterreichens (35) die Schritte umfaßt:

- a) Senden von Betriebsparametern des zweiten Zugangspunkts aus dem zweiten Zugangspunkt zu dem ersten Zugangspunkt;
- b) Weiterleiten der Betriebsparameter des zweiten Zugangspunkts von dem ersten Zugangspunkt zu dem Knoten; und
- c) Einstellen von Knotenparametern in Abhängigkeit von den Parametern des zweiten Zugangspunkts derart, daß eine Kommunikation zwischen dem Knoten und dem zweiten Zugangspunkt eingerichtet wird.

gangspunkt eingerichtet wird.

5. Das Verfahren nach Anspruch 4, wobei einer der Betriebsparameter des zweiten Zugangspunkts einen Spreizungscode (spreading code) umfaßt, der von dem zweiten Zugangspunkt benutzt wird.

6. Das Verfahren nach Anspruch 1, ferner umfassend den Schritt des Weiterleitens einer Nachricht, die für den Knoten bestimmt ist, aus dem ersten Zugangspunkt zu dem zweiten Zugangspunkt bei Empfang der Nachricht an dem ersten Zugangspunkt, nachdem das Weiterreichen (Handoff) durchgeführt worden ist (35), wobei der zweite Zugangspunkt die Nachricht den Knoten übermittelt.

7. Das Verfahren nach Anspruch 1, ferner umfassend den Schritt des Informierens weiterer Zugangspunkte, daß der Knoten an den zweiten Zugangspunkt weitergereicht worden ist, nachdem das Weiterreichen ausgeführt ist (35), so daß die Kommunikation zu dem Knoten über den zweiten Zugangspunkt erreicht wird.

8. Das Verfahren nach Anspruch 1, ferner umfassend nach dem Auswahlschritt den Schritt des Bestimmens durch den Knoten, ob eine Verbindungsfähigkeit (connectivity) zu einem anderen Zugangspunkt eingerichtet werden soll.

9. Das Verfahren nach Anspruch 8, ferner umfassend die Schritte des:

Übermittels einer Weiterreichinitiiierungsnachricht aus dem ersten Zugangspunkt zu dem Knoten, der angefordert hat, daß der Knoten eine Verbindungsfähigkeit zu einem anderen Zugangspunkt einrichtet; und Bestimmens durch den Knoten, ob die Verbindungsfähigkeit zu einem anderen Zugangspunkt eingerichtet werden soll, in Abhängigkeit von der Anforderung des ersten Zugangspunkts.

10. Das Verfahren nach Anspruch 1, ferner umfassend vor dem Auswahlschritt den Schritt, daß der erste Zugangspunkt bestimmt, ob der Knoten eine Verbindungsfähigkeit zu einem anderen Zugangspunkt einrichten soll.

11. Ein Verfahren zum Aufrechterhalten einer Verbindungsfähigkeit (connectivity) eines Knotens in einem drahtlosen lokalen Netzwerk, LAN, wobei das LAN eine Mehrzahl von Zellen (11) aufweist, wobei jede Zelle wenigstens einen Zugangspunkt (13) zum Austauschen von Informationen zwischen Zellen und wenigstens einen Knoten (10) zum Kommunizieren über das LAN über die Zugangspunkte



enthält, wobei das Verfahren die Schritte umfaßt, daß

der Knoten bestimmt, ob eine Verbindungsfähigkeit zu einem anderen Zugangspunkt eingerichtet werden soll; und

dann, wenn der Knoten bestimmt, daß eine Verbindungsfähigkeit zu einem anderen Zugangspunkt eingerichtet werden soll:

der Knoten einen zweiten Zugangspunkt als Kandidaten zum Akzeptieren eines Weiterreichens des Knotens von dem ersten Zugangspunkt auswählt (31);

eine Instruktion von dem Knoten zu dem ersten Zugangspunkt übermittelt wird (32), die den ersten Zugangspunkt instruiert, eine Anforderung an den zweiten Zugangspunkt weiterzuleiten, daß der zweite Zugangspunkt ein Weiterreichen des Knotens von dem ersten Zugangspunkt zu dem zweiten Zugangspunkt akzeptiert;

die Anforderung aus dem ersten Zugangspunkt zu dem zweiten Zugangspunkt weitergeleitet wird (33);

bestimmt wird (34), ob der zweite Zugangspunkt das Weiterreichen akzeptiert; dann, wenn der zweite Zugangspunkt feststellt, daß er das Weiterreichen akzeptiert:

der zweite Zugangspunkt Betriebsparameter aus dem zweiten Zugangspunkt zu dem ersten Zugangspunkt sendet, wobei einer der Betriebsparameter einen Spreizungscode umfaßt, der von dem zweiten Zugangspunkt benutzt wird;

die Betriebsparameter des zweiten Zugangspunkts von dem ersten Zugangspunkt an den Knoten weitergeleitet werden;

Knotenparameter in Abhängigkeit von den Betriebsparametern des zweiten Zugangspunktes so eingestellt werden, daß eine Kommunikation zwischen dem Knoten und dem zweiten Zugangspunkt eingerichtet wird, wodurch ein Weiterreichen ausgeführt wird (36), und

dann, wenn der zweite Zugangspunkt feststellt, daß er das Weiterreichen nicht akzeptieren kann, die Schritte des Auswählens, Übermittels, Weiterleitens und Bestimmens wiederholt werden.

12. Eine Einrichtung zum Aufrechterhalten einer Verbindungsfähigkeit (connectivity) in einem drahtlosen lokalen Netzwerk (LAN), das eine Mehrzahl von Zellen (11) aufweist, wobei die Einrichtung aufweist:

eine Mehrzahl von Zugangspunkten (13) zum Austauschen von Informationen zwischen den Zellen;

mit einem ersten und einem zweiten Zugangspunkt verbundene Verbindungsmittel zum Ermöglichen einer Kommunikation zwischen dem ersten und dem zweiten Zugangspunkt; und wenigstens einen Knoten (10) zum Kommunizieren über das LAN über die Zugangspunkte;

wobei jeder Knoten aufweist:

Auswahlmittel zum Auswählen eines zweiten Zugangspunkts als Kandidaten für ein Weiterreichen des Knotens von einem ersten Zugangspunkt;

Instruktionsmittel zum Bilden und Übermitteln einer Instruktion an den ersten Zugangspunkt, die den ersten Zugangspunkt instruiert, eine Anforderung an den zweiten Zugangspunkt weiterzuleiten, die anfordert, daß der zweite Zugangspunkt ein Weiterreichen des Knotens von dem ersten Zugangspunkt akzeptiert; und Weiterreichmittel zum Weiterreichen des Knotens an den zweiten Zugangspunkt derart, daß der Knoten mit dem zweiten Zugangspunkt kommuniziert.

13. Die Einrichtung nach Anspruch 12, wobei der zweite Zugangspunkt Zugangspunktbestimmungsmittel aufweist zum Bestimmen, ob der zweite Zugangspunkt das Weiterreichen akzeptieren wird.

14. Die Einrichtung nach Anspruch 13, wobei dann, wenn die Zugangspunktbestimmungsmittel bestimmen, das Weiterreichen zurückzuweisen, die Auswahlmittel einen alternativen Zugangspunkt auswählen und die Instruktionsmittel eine Instruktion an den ersten Zugangspunkt übermitteln, die den ersten Zugangspunkt instruieren, eine Anforderung an den alternativen Zugangspunkt weiterzuleiten, die anfordert, daß der alternative Zugangspunkt ein Weiterreichen des Knotens akzeptiert.

15. Die Einrichtung nach Anspruch 12, wobei:

der zweite Zugangspunkt Mittel zum Weiterleiten von Betriebsparametern des zweiten Zugangspunkts zu dem Knoten über die Verbindungsmittel und den ersten Zugangspunkt aufweisen; und

die Weiterreichmittel Mittel zum Einstellen von Knotenparametern in Abhängigkeit von den Betriebsparametern des zweiten Zugangspunkts umfassen, so daß eine Kommunikation zwischen dem Knoten und dem zweiten Zugangspunkt eingerichtet wird.

16. Die Einrichtung nach Anspruch 15, wobei einer der Betriebsparameter des zweiten Zugangspunkts einen Spreizungscode umfaßt, der von dem zweiten Zugangspunkt verwendet wird. 5
17. Die Einrichtung nach Anspruch 12, wobei der erste Zugangspunkt ferner Weiterleitmittel zum Weiterleiten einer Nachricht, die für den Knoten bestimmt ist, aus dem ersten Zugangspunkt zu dem zweiten Zugangspunkt bei Empfang der Nachricht an dem ersten Zugangspunkt umfaßt. 10
18. Die Einrichtung nach Anspruch 12, wobei der erste Zugangspunkt ferner Mittel zum Informieren weiterer Zugangspunkte darüber, daß der Knoten zu dem zweiten Zugangspunkt weitergereicht worden ist, aufweist, so daß eine Kommunikation an den Knoten direkt über den zweiten Zugangspunkt erreicht wird. 15
19. Die Einrichtung nach Anspruch 12, wobei der Knoten ferner Initiierungsbestimmungsmittel zum Bestimmen, ob der Knoten eine Verbindungsfähigkeit mit einem anderen Zugangspunkt einrichtet, aufweist. 20
20. Die Einrichtung nach Anspruch 19, wobei der erste Zugangspunkt ferner ein Weiterreichanforderungsmittel zum Übermitteln einer Weiterreichinitiierungsnachricht aus dem ersten Zugangspunkt zu dem Knoten, der anfordert, daß der Knoten eine Verbindungsfähigkeit zu einem anderen Zugangspunkt einrichtet, aufweist, und die Initiierungsbestimmungsmittel ferner Mittel zum Bestimmen, ob der Knoten eine Verbindungsfähigkeit zu einem anderen Zugangspunkt in Abhängigkeit von der Anforderung des ersten Zugangspunkts einrichtet, aufweisen. 25 30 35
21. Die Einrichtung nach Anspruch 19, wobei der erste Zugangspunkt ferner Mittel zum Bestimmen, ob der Knoten eine Verbindungsfähigkeit zu einem anderen Zugangspunkt einrichten sollte, aufweist. 40 45

#### Revendications

1. Un procédé permettant le maintien de la connectivité d'un noeud dans un réseau local, LAN, sans fil, le réseau comprenant une pluralité de cellules (11), chaque cellule comprenant au moins un point d'accès (13) pour communiquer des informations entre les cellules et au moins un noeud (10) pour communiquer sur le réseau local, par l'intermédiaire desdits points d'accès, le procédé comprenant les étapes consistant à : 50 55

(a) sélectionner par le noeud un second point

d'accès (31) en tant que candidat pour accepter un transfert intercellulaire du noeud à partir d'un premier point d'accès ;

(b) communiquer une instruction émanant du noeud pour le premier point d'accès (32), enjoignant au premier point d'accès de retransmettre une requête au second point d'accès, demandant au second point d'accès d'accepter un transfert intercellulaire du noeud à partir du premier point d'accès vers le second point d'accès ;

(c) retransmettre ladite requête émanant du premier point d'accès vers le second point d'accès (33) ; et

(d) réaliser le transfert intercellulaire (35), de sorte que le noeud communique avec le second point d'accès.

2. Le procédé comme énoncé dans la revendication 1, comprenant de plus l'étape permettant de déterminer si ledit second point d'accès acceptera la requête de transfert intercellulaire (34).

3. Le procédé comme énoncé dans la revendication 2, comprenant de plus l'étape de répétition desdites étapes permettant de sélectionner, communiquer, retransmettre et déterminer, si ledit second point d'accès décide de ne pas accepter ladite requête de transfert intercellulaire.

4. Le procédé comme énoncé dans la revendication 1, dans lequel l'étape de réalisation du transfert intercellulaire (35) comprend les étapes consistant à :

(a) transmettre des paramètres de fonctionnement du second point d'accès à partir dudit second point d'accès vers le premier point d'accès ;

(b) retransmettre lesdits paramètres de fonctionnement du second point d'accès vers ledit noeud à partir dudit premier point d'accès ; et

(c) ajuster les paramètres du noeud en réponse auxdits paramètres du second point d'accès, afin d'établir la communication entre ledit noeud et ledit second point d'accès.

5. Le procédé selon la revendication 4, dans lequel un desdits paramètres de fonctionnement du second point d'accès comprend un code d'étalement utilisé par ledit second point d'accès.

6. Le procédé selon la revendication 1, comprenant de plus l'étape consistant, une fois ledit transfert intercellulaire réalisé (35), à transférer un message destiné audit noeud et émanant dudit premier point d'accès vers ledit second point d'accès, sur réception dudit message audit premier point d'accès, dans lequel le second point d'accès communique

le message audit noeud.

7. Le procédé comme énoncé dans la revendication 1, comprenant de plus l'étape consistant, une fois ledit transfert intercellulaire réalisé (35), à signaler aux autres points d'accès que ledit noeud a été transféré audit second point d'accès, de sorte que les communications vers ledit noeud sont réalisées par l'intermédiaire dudit second point d'accès. 5
8. Le procédé comme énoncé dans la revendication 1, avant ladite étape de sélection, comprenant de plus l'étape consistant à ce que le noeud décide s'il doit établir la connectivité avec un autre point d'accès. 10
9. Le procédé comme énoncé dans la revendication 8, comprenant de plus les étapes consistant à : 15
  - communiquer un message d'amorçage d'un transfert intercellulaire, émanant dudit premier point d'accès vers ledit noeud, demandant audit noeud d'établir la connectivité avec un autre point d'accès ; et 20
  - ce que ledit noeud décide s'il doit établir la connectivité avec un autre point d'accès en réponse à la requête du premier point d'accès. 25
10. Le procédé selon la revendication 1, avant ladite étape de sélection, comprenant de plus l'étape consistant à ce que le premier point d'accès décide si le noeud doit établir la connectivité avec un autre point d'accès. 30
11. Un procédé permettant le maintien de la connectivité d'un noeud dans un réseau local, LAN, sans fil, le LAN comprenant une pluralité de cellules (11), chaque cellule comprenant au moins un point d'accès (13) pour communiquer les informations entre les cellules et au moins un noeud (10) pour communiquer sur le réseau local, par l'intermédiaire desdits points d'accès, ledit procédé comprenant les étapes consistant à : 35
  - ce que ledit noeud décide s'il doit établir la connectivité avec un autre point d'accès ; et 40
  - si ledit noeud décide d'établir la connectivité avec un autre point d'accès : 45
    - sélectionner par ledit noeud un second point d'accès (31) en tant que candidat pour accepter un transfert intercellulaire dudit noeud à partir d'un premier point d'accès ; 50
    - communiquer une instruction émanant dudit noeud vers ledit premier point d'accès (32), enjoignant audit premier point d'accès de retransmettre une requête audit second point d'accès, demandant audit second point d'accès d'ac- 55

cepter un transfert intercellulaire dudit noeud à partir dudit premier point d'accès vers ledit second point d'accès ;

- retransmettre ladite requête émanant dudit premier point d'accès vers ledit second point d'accès (33) ;
  - déterminer si ledit second point d'accès acceptera ledit transfert intercellulaire (34) ;
  - si ledit second point d'accès décide d'accepter ledit transfert intercellulaire :
    - transmettre les paramètres de fonctionnement du second point d'accès à partir dudit second point d'accès vers ledit premier point d'accès, dans lesquels l'un desdits paramètres de fonctionnement comprend un code d'étalement utilisé par ledit second point d'accès ;
    - retransmettre lesdits paramètres de fonctionnement du second point d'accès audit noeud à partir dudit premier point d'accès ;
    - ajuster les paramètres du noeud en fonction desdits paramètres de fonctionnement du second point d'accès, afin d'établir la communication entre ledit noeud et ledit second point d'accès, réalisant ainsi un transfert intercellulaire (36) ; et
    - si ledit second point d'accès décide de ne pas accepter ledit transfert intercellulaire, répéter lesdites étapes de sélection, communication, retransmission et détermination.
12. Un appareil permettant le maintien de la connectivité dans un réseau local, LAN, sans fil, comprenant une pluralité de cellules (11), l'appareil comprenant :
- une pluralité de points d'accès (13) pour communiquer les informations entre les cellules ;
  - un moyen de liaison connecté entre les premier et second points d'accès pour permettre les communications entre lesdits premier et second points d'accès ; et
  - au moins un noeud (10) pour communiquer sur le réseau local par l'intermédiaire desdits points d'accès ;
- chaque noeud comprenant :
- un moyen de sélection pour sélectionner un second point d'accès en tant que candidat pour le transfert intercellulaire dudit noeud à partir d'un premier point d'accès ;
  - un moyen d'instruction pour former et communiquer une instruction audit premier point d'accès enjoignant audit premier point d'accès de retransmettre une requête audit second point d'accès, demandant audit second point d'accès d'accepter un transfert intercellulaire dudit

- noeud à partir dudit premier point d'accès ; et  
 - un moyen de transfert intercellulaire pour transférer ledit noeud vers ledit second point d'accès, de sorte que le noeud communique avec le second point d'accès. 5
13. L'appareil comme énoncé dans la revendication 12, dans lequel ledit second point d'accès comprend un moyen de détermination de point d'accès pour décider si ledit second point d'accès acceptera ledit transfert intercellulaire. 10
14. L'appareil comme énoncé dans la revendication 13, dans lequel, si ledit moyen de détermination de point d'accès permet de décider de rejeter ledit transfert intercellulaire, ledit moyen de sélection est adapté pour sélectionner un autre point d'accès et ledit moyen d'instruction permet de communiquer une instruction audit premier point d'accès, enjoignant au premier point d'accès de retransmettre une requête à l'autre point d'accès, demandant à cet autre point d'accès d'accepter le transfert intercellulaire du noeud. 15 20
15. L'appareil comme énoncé dans la revendication 12, dans lequel : 25
- ledit second point d'accès comprend un moyen pour retransmettre les paramètres de fonctionnement du second point d'accès audit noeud par l'intermédiaire dudit moyen de liaison et dudit premier point d'accès ; et 30
  - ledit moyen de transfert intercellulaire comprend un moyen pour ajuster les paramètres du noeud en fonction desdits paramètres de fonctionnement du second point d'accès, afin d'établir les communications entre ledit noeud et ledit second point d'accès. 35
16. L'appareil comme énoncé dans la revendication 15, dans lequel l'un desdits paramètres de fonctionnement du second point d'accès comprend un code d'étalement utilisé par ledit second point d'accès. 40
17. L'appareil comme énoncé dans la revendication 12, ledit premier point d'accès comprenant de plus un moyen de transfert pour transférer un message destiné audit noeud à partir dudit premier point d'accès vers ledit second point d'accès, sur réception dudit message audit premier point d'accès. 45 50
18. L'appareil comme énoncé dans la revendication 12, ledit premier point d'accès comprenant de plus un moyen pour signaler à d'autres points d'accès que ledit noeud a été transféré audit second point d'accès, de sorte que les communications vers ledit noeud sont réalisées directement par l'intermédiaire dudit second point d'accès. 55
19. L'appareil comme énoncé dans la revendication 12, dans lequel ledit noeud comprend de plus un moyen de détermination d'amorçage pour déterminer si ledit noeud établira la connectivité avec un autre point d'accès.
20. L'appareil comme énoncé dans la revendication 19, dans lequel :
- ledit premier point d'accès comprend de plus un moyen de requête de transfert intercellulaire pour communiquer un message informant de l'amorçage d'un transfert intercellulaire à partir dudit premier point d'accès vers ledit noeud, demandant audit noeud d'établir la connectivité avec un autre point d'accès, et
  - ledit moyen de détermination d'amorçage comprend de plus un moyen pour déterminer si ledit noeud établira la connectivité avec un autre point d'accès en réponse à la requête dudit premier point d'accès.
21. L'appareil selon la revendication 19, dans lequel ledit premier point d'accès comprend de plus un moyen pour déterminer si le noeud doit établir la connectivité avec un autre point d'accès.

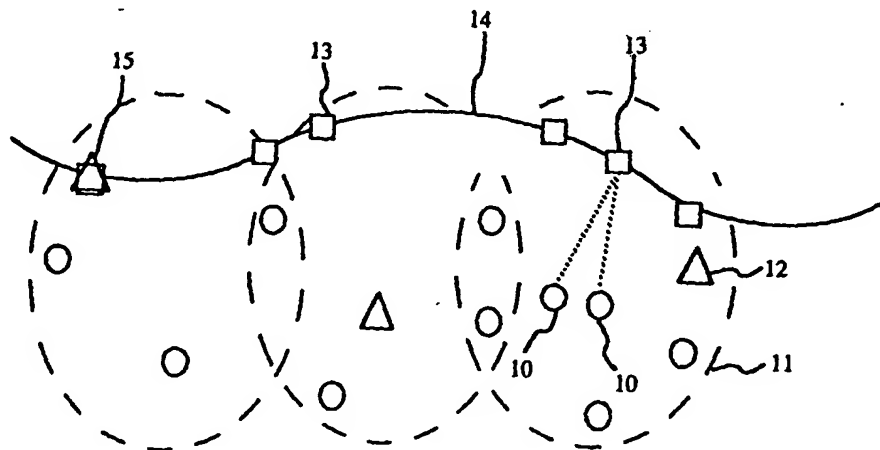


FIGURE 1

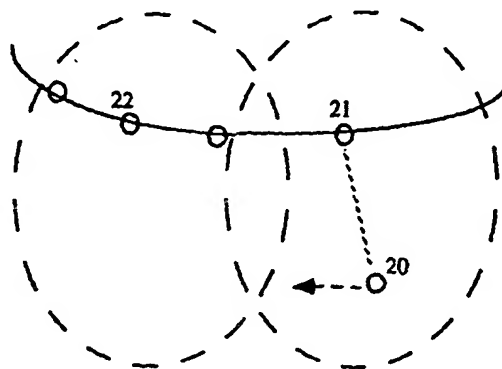


FIGURE 2A

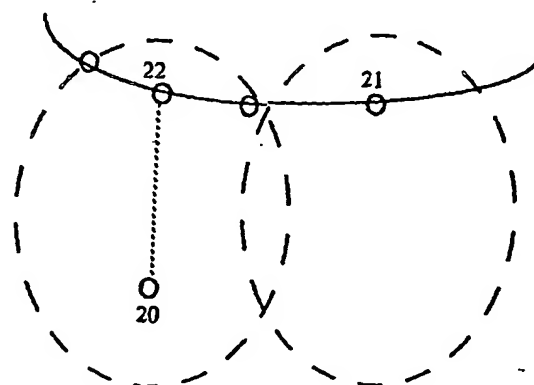


FIGURE 2B

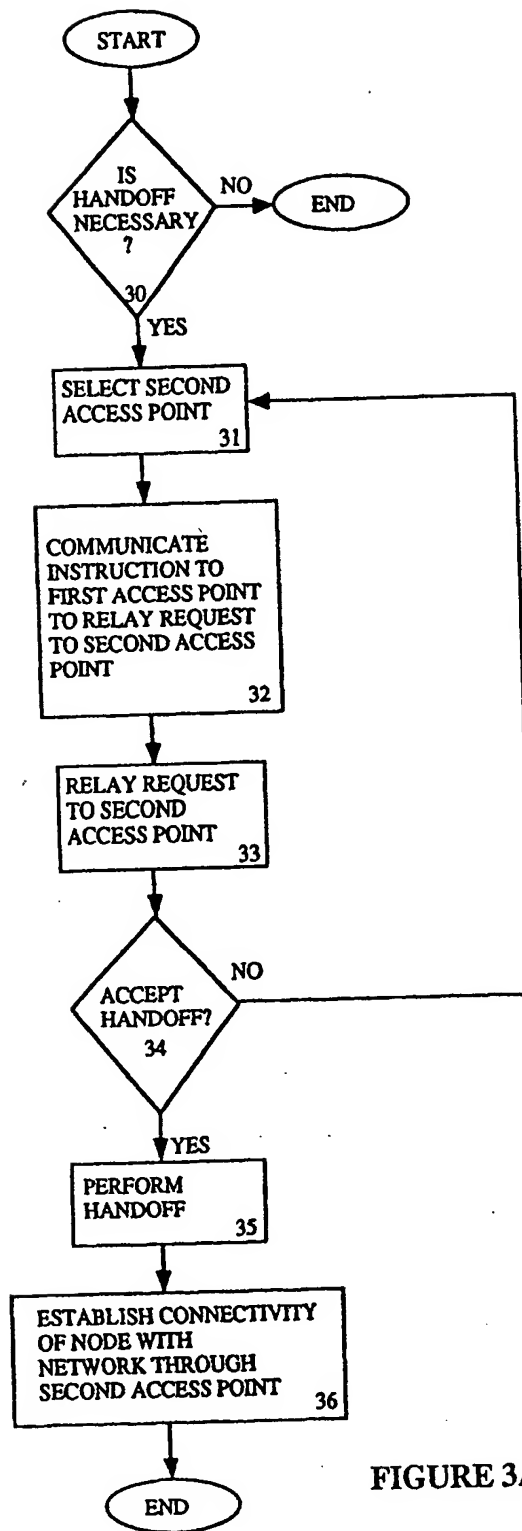


FIGURE 3A

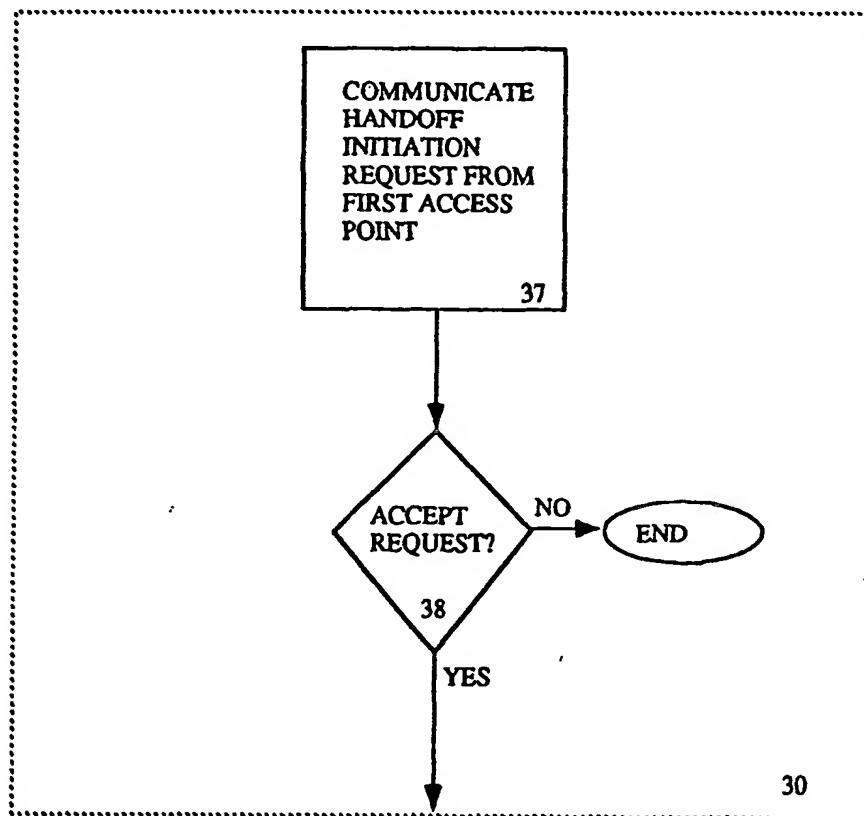
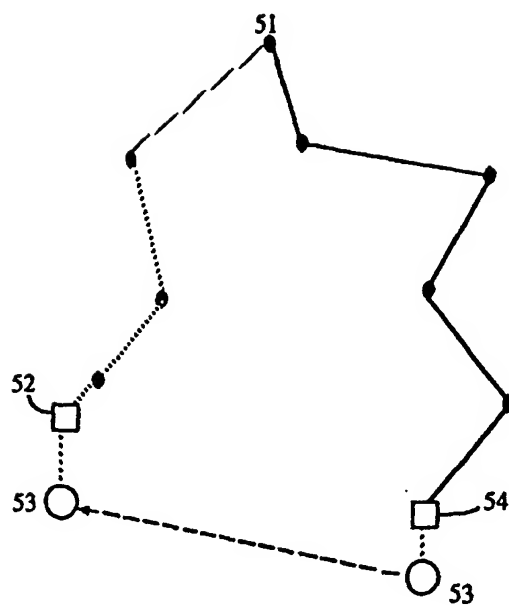


FIGURE 3B



**FIGURE 4**  
**PRIOR ART**

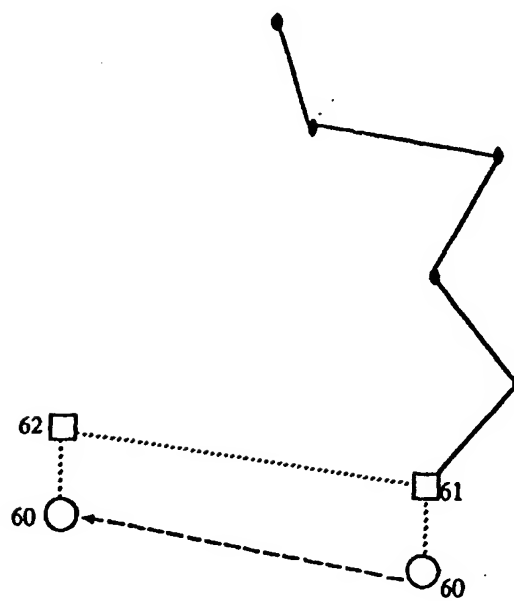


FIGURE 5



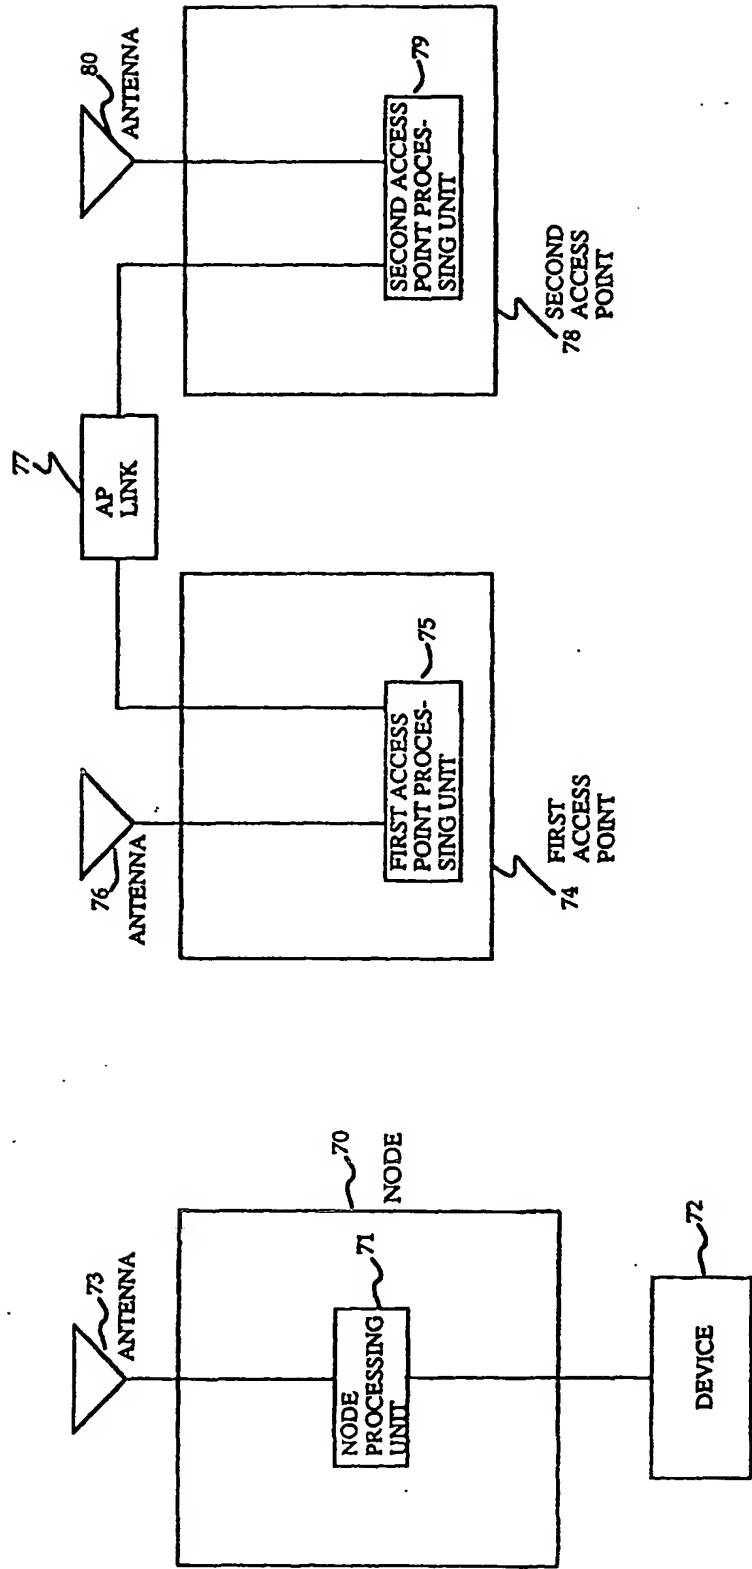


FIGURE 6

**THIS PAGE LEFT BLANK**